

MV20




Standard grade brake linings designed for 20,000 lb axle load applications



MARATHON MV20 STANDARD GRADE LININGS are made from an asbestos-free friction material developed specifically for the price sensitive buyer. MV20 is a standard grade brake lining that meets the requirements of FMVSS 121 dynamometer testing standards at 20,000 lbs. MV20 is designed for use on trucks, tractors, and trailers operating in general freight and on-highway applications that do not require a severe service lining.



FMVSS 121 TEST RESULTS

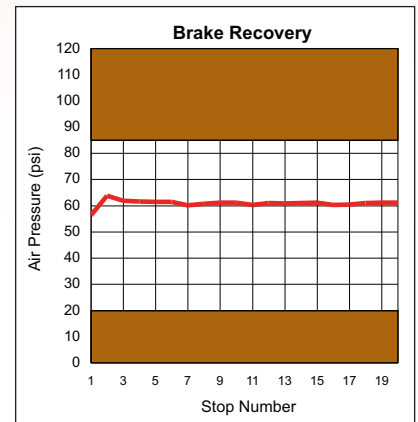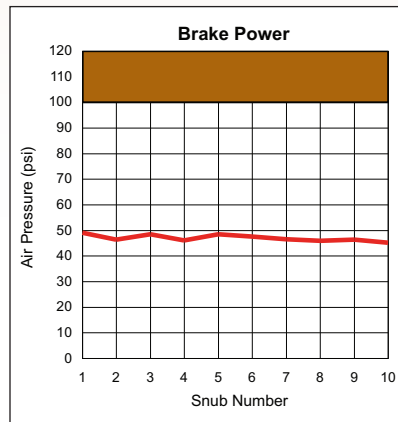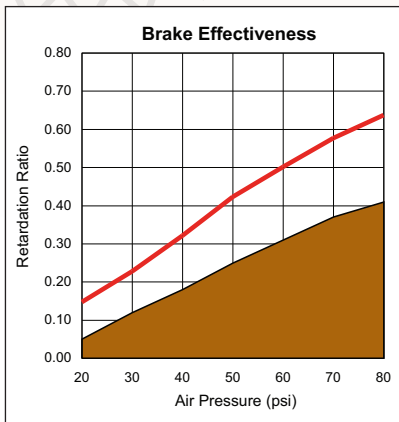

Testing conducted in accordance with FMVSS 121 criteria @ 20,000 lb axle load: 16 1/2 x 7 inch S-cam air brake; type 30 air chamber and 5.5 inch slack adjuster; and a 20.8 inch tire rolling radius. Shaded area indicates non-compliance.



ISO 9001:2008

Marathon Brake • 125 Old Mill Road • Cartersville, GA 30120
Phone: 800-223-5201 • Fax: 770-607-1698 • www.MarathonBrake.com

ISO 14001:2004